

LCM-6013CV-L Microphone Unit (Wired)

INTRODUCTION

LCM-6013CV-L is an integrated conference microphone that offers both chairman and delegate modes. Despite its compact and convenient design, it is equipped with a large touch screen, built-in speaker, and high-fidelity microphone unit. It supports priority speaking for the chairman, the ability to approve/disallow delegate speaking, and real-time display of speakers and waiting list. The audio transmission adopts a digital design, providing excellent anti-interference performance, making it suitable for small and medium-sized conference rooms and various conference scenarios.

MAIN FEATURES

- **4" HD Capacitive Touchscreen:** Equipped with a 4" capacitive touchscreen that clearly presents meeting status, sign-in/voting results, and speaker information.
- **Built-In Speaker:** The unit includes a built-in speaker for direct playback of voice prompts or meeting audio.
- **Super Cardioid High-Fidelity Condenser Microphone:** Equipped with a 14mm gold-plated super cardioid high-fidelity condenser microphone capsule for long-distance sound pickup, ensuring clear and accurate sound capture during meetings.
- **Chairman/Delegate Mode:** Supports both chairman and delegate modes, with the chairman microphone offering priority control, voting management, and other features, while the delegate microphone provides standard speaking functionality.
- **Voting & Sign-In Functionality:** Integrated voting and sign-in features streamline participant management and interaction, improving conference efficiency.



Voting & Registration

4" Touchscreen

Supercardioid Pickup

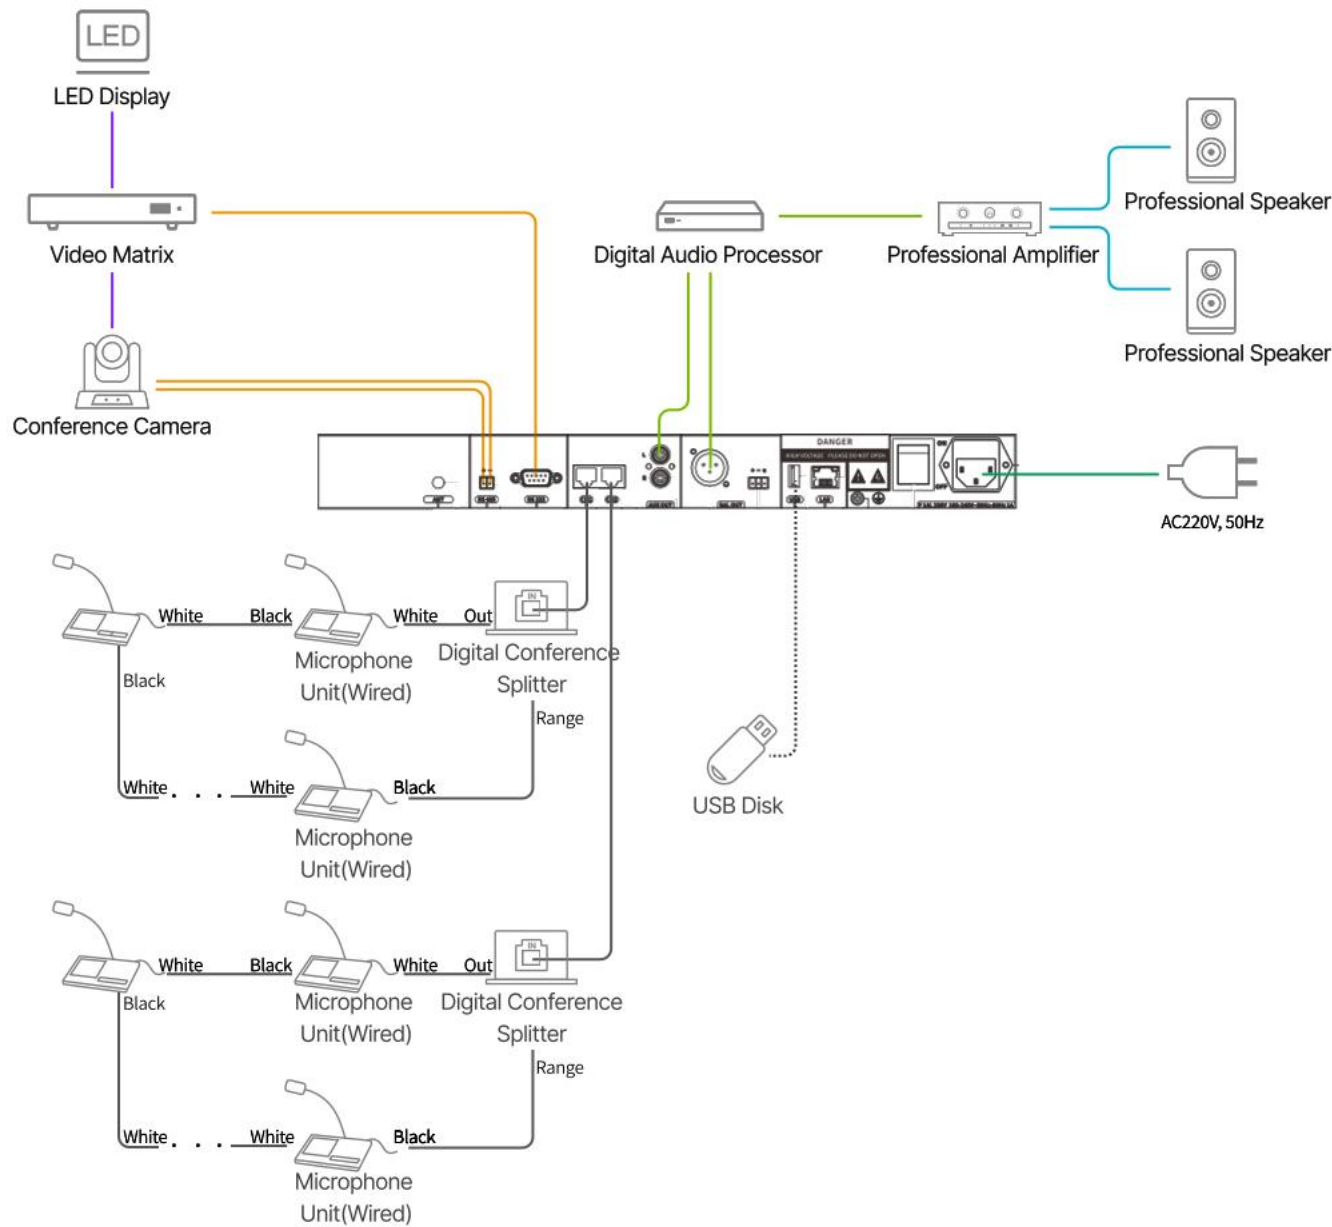
Built-in
Speaker



PARAMETERS:

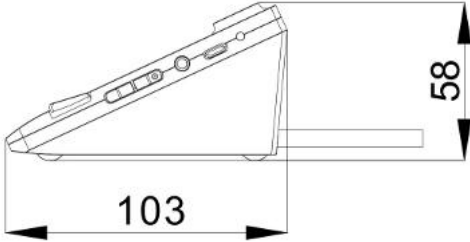
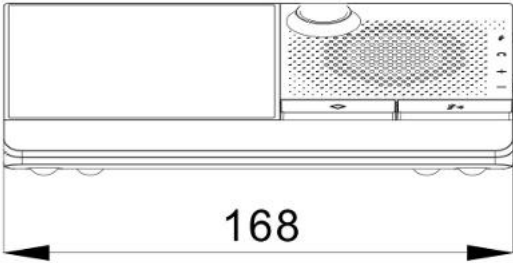
Input Voltage	24VDC, centrally powered by the host
Standby Power Consumption	<3.5W
Display	4" touch screen
Resolution	480 × 480
Conference Unit Port	2 × RJ45
Connection mode	Daisy-chain
Built-in speaker	1 × 1W
Sound Pickup Microphone Head	1 × 14mm gold-plated condenser microphone head
Directivity	supercardioid
Microphone frequency response	20-20K Hz
Microphone sensitivity	-41dB±2dB (0db=1V/Pa at 1KHz)
Maximum sound pressure level of microphone	120dB SPL, 1KHz at 1% T.H.D
Dimensions (Without Gooseneck Stem)	168*103*58 mm
Length of microphone from mounting surface (Microphone stem additional purchase required)	D14001: 380mm D14002: 465mm D14004: 580mm
Net Weight	0.72 kg
Package Dimensions	246*178*116 mm

CONNECTION DIAGRAM



— Network Cable — Audio Cable — Speaker Cable — Control Signal Cable — HDMI Cable

DIMENSION

 			
LCM-6013CV-L		PRODUCT DESCRIPTION MICROPHONE UNIT (WIRED)	
MM	WEIGHT	OUTER DIMENSIONS (W*H*D) 168*103*58 mm	UNIT HEIGHT N/A
	0.72 kg		