



NAC-301C-CP


Wall Speaker

Composite speaker diaphragm, with clear and melodious sound quality, easy and quick installation, composite suspension edge and damping treatment, longer lifespan


Constant Voltage

Clear Voice

CIRCUIT DIAGRAM

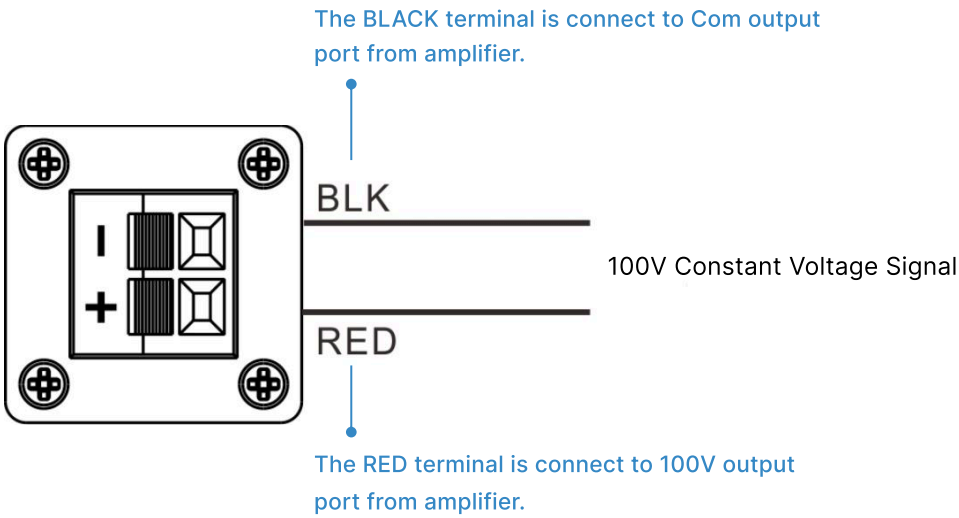

DIMENSIONAL DRAWING

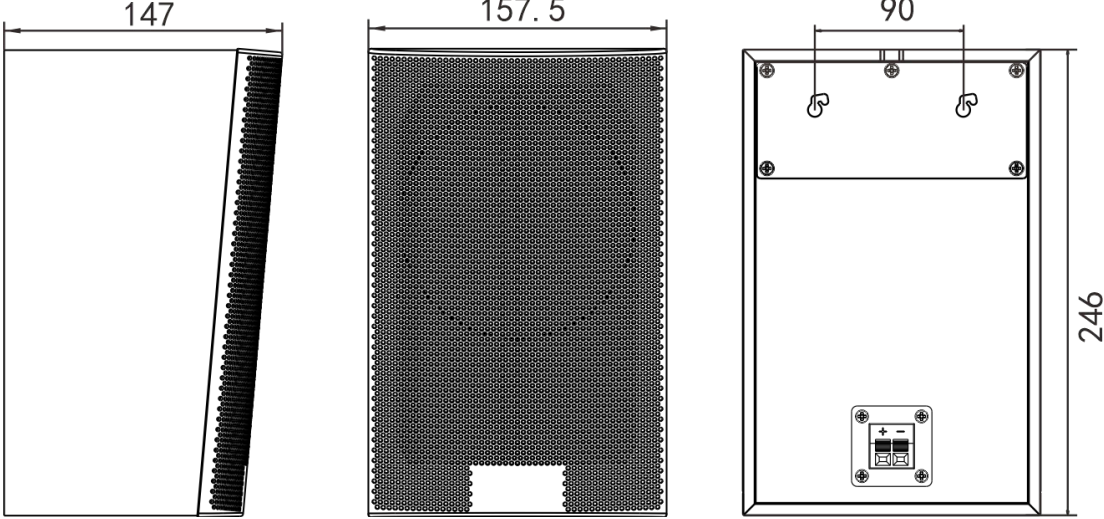

01


SPECIFICATION

POWER PARAMETERS	MECHANICAL & ENVIRONMENT PROPERTIES
Rated Power: 6W	Mounting Method: Wall-Mounted
Input Voltage: 100V	Installation Environment: Dry Indoor Locations
	Product Color: White
	Body Material: Wooden
	Product Dimensions: 246*157*147mm
	Product Weight: 1.5KG
	Warranty: 2 Years
SPEAKER PARAMETERS	ACCESSORIES
Sensitivity: 87dB±3dB	1×Installation Manual
Frequency Response: 200Hz-20KHz	1×Certification Card
Speaker Unit: 1×5 Inch Paper Cone Full Range Speaker	3×Plastic Expansion Set
	3×Cup Head Self-Tapping Screw(M4*35)
	1×Bracket

APPLICATION

Application 1

The 6Watt 100Volt Wall Mount Speaker NAC-301C-CP can be connected with IP Amplifier XC-9508 for receive broadcasting or announcement from Audio Management Software or IP paging Console.

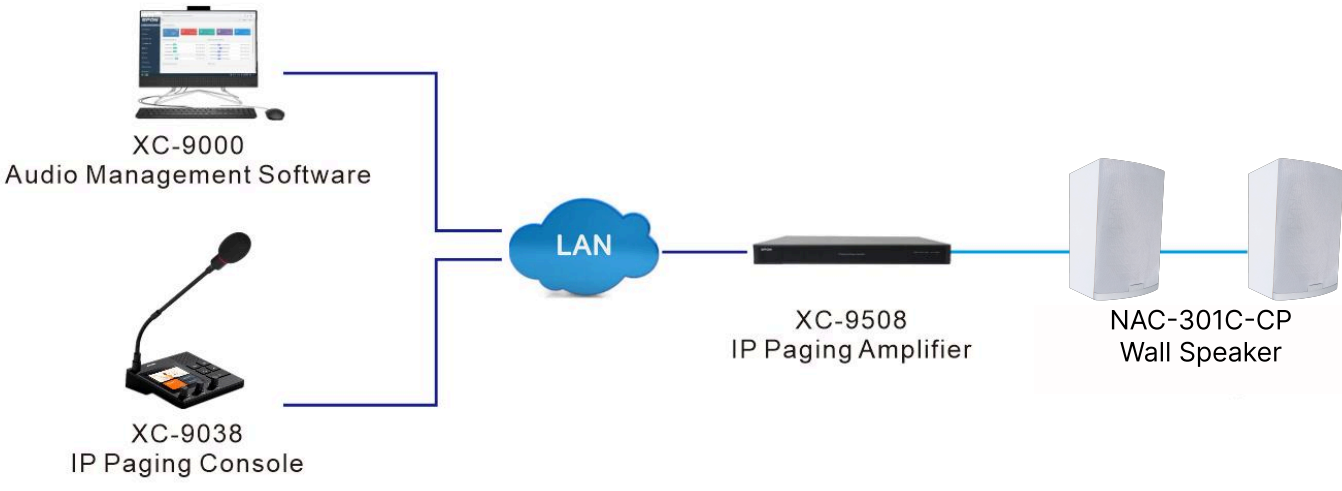

02

INSTALLATION INSTRUCTIONS

STEP 1

M4 screw

Bracket

Plastic expansion set

wall

Use 2 plastic expansion sleeves and 2 M4 screws to install the bracket horizontally.

STEP 2

IP network active speaker

wall

Align the two mounting holes on the back of the device with the two rivets of the bracket. Insert it from the large opening of the mounting hole, and then move it up and right to lock and buckle the device on the rivets of the bracket on the wall.