



NAS-8521B

Audio Intercom Panel

Built-In Recording
Output

High
Security

2-Channel Alarm
Input And Output

Daisy-chain

MAIN FEATURES

▲ Audio Features

- Built-in Speaker and Microphone: Includes a 3W speaker and microphone capsule. Enables receiving broadcasts and hands-free calls.

▲ Emergency Assistance

- Single Call Button: Equipped with a dedicated emergency assistance button.


▲ Design and Installation

- Versatile Installation Options: Suitable for concealed or visible installation.
- Durable Construction: Features a full-metal casing and corrosion-resistant aluminum brushed panel. Provides anti-stab protection and tamper alarm function. IP54 protection rating for outdoor use.

▲ Call Functionality

- Instant Call Initiation: Press the CALL button on the panel to initiate calls. Supports full-duplex communication with the server setting the call target.
- Customizable Ringtone: Allows customization of call connection, busy signal, and hang-up tones.

DIMENSIONAL DRAWING

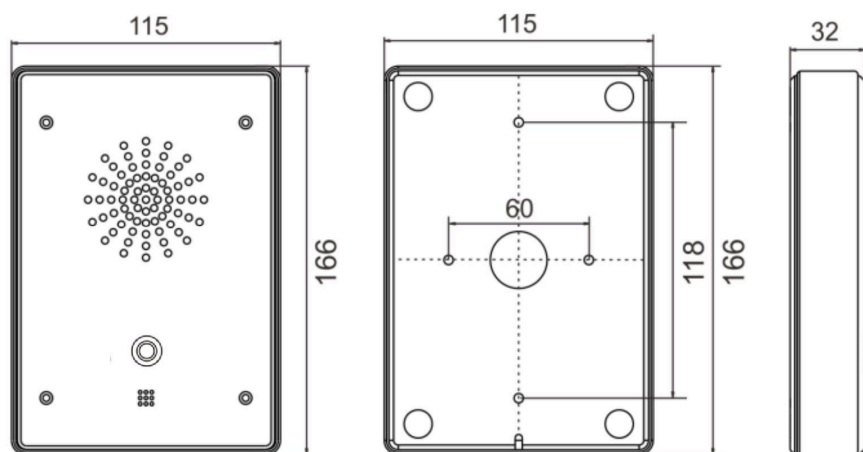

SPECIFICATION

POWER PARAMETERS

Power Input	Powered By Intercom Host NAS-8521A
-------------	---------------------------------------


MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method	Surface Mount
Installation Environment	Dry Indoor Locations
Product Color	Silver
Shell Material	Aluminum
Product Dimensions (Mm)	115×166×32mm
Product Weight	0.8Kg
Warranty	2 Years

ACCESSORIES

4×Plastic Expansion Sleeve
4×Semi-Circular Head Self-Tapping Screws (M425)
1 Theft-Proof Hexagonal Wrench
5×Hexagonal Screw (M38, 304)
1×Plug (16*7.5)
1×Operation Instruction Card
1×Plug (SPSI-08)
1×Plug (SPSI-09)
1×Quick Installation Guide
1×Certification Card

INTERFACE DESCRIPTION

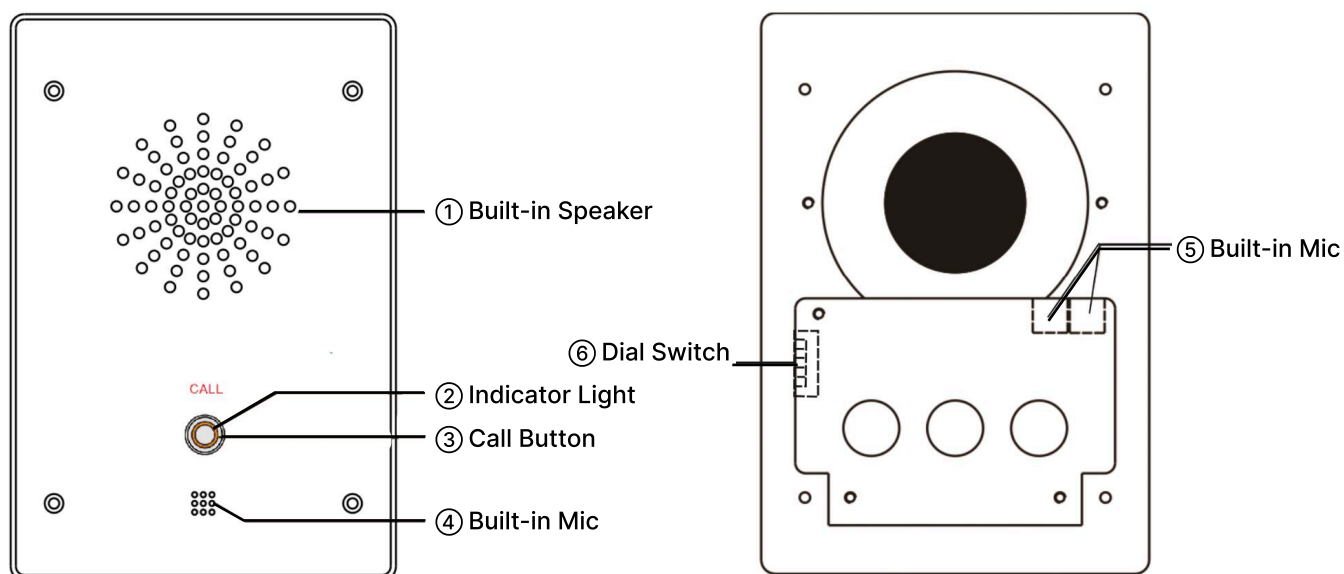


DIAL SWITCH RULE

Button	First Dial Switch	Second Dial Switch	Third Dial Switch	Forth Dial Switch	Fifth Dial Switch
1#	ON	ON	ON	ON	5
2#	1	ON	ON	ON	5
3#	ON	2	ON	ON	5
4#	1	2	ON	ON	5
5#	ON	ON	3	ON	5
6#	1	ON	3	ON	5
7#	ON	2	3	ON	5
8#	1	2	3	ON	5

APPLICATIONS

Application 1

The Audio Intercom Panel NAS-8521B can be connected with the IP Split Type Audio Intercom Controller NAS-8521A to make two-way intercom with IP Master station, the call target of the Audio Intercom Panel NAS-8521B need to be set on the management software.

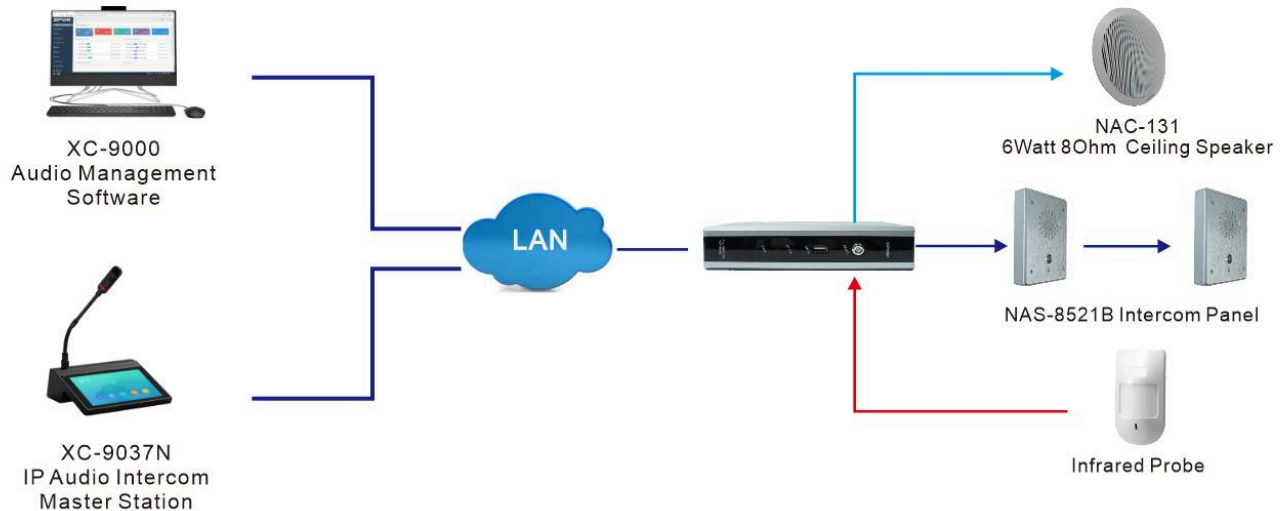

INSTALLATION

