



NAS-8521D

Audio Intercom Panel

Built-In Recording
Output

High
Security

2-Channel Alarm
Input And Output

Daisy-chain

MAIN FEATURES

▲ Audio and Communication

- Built-in Speaker and Microphone: Features a 3W speaker and microphone capsule for broadcasts and hands-free calls.

▲ Call Buttons

- Single Call Button: Equipped with a single button for emergency assistance.

▲ Design and Installation

- Embedded Installation: Designed for embedded installation for a sleek appearance.
- Robust Construction: Constructed with a full-metal casing and corrosion-resistant aluminum brushed panel.
- Safety Features: Includes anti-stab protection and a tamper alarm function.
- Protection Rating: Boasts an IP54 protection rating for durability.

▲ Call Functionality

- Instant Call Initiation: Press the CALL button to initiate a call, with the server determining the call target.
- Full-Duplex Communication: Supports full-duplex communication for seamless interaction.

▲ Customization Options

- Call Ringtone Customization: Allows customization of call connection, busy signal, and hang-up tones.

SPECIFICATION

POWER PARAMETERS

Power Input	Powered By Audio Intercom Splitter NAS-8521G Or DC12V/3.3A
-------------	--


MECHANICAL & ENVIRONMENTAL PROPERTIES

Mounting Method	Embedded Mount
Installation Environment	Dry Indoor Locations
Product Color	Silver
Shell Material	Aluminum
Product Dimensions (Mm)	62×150×31mm
Product Weight	0.3Kg
Warranty	2 Years


ACCESSORIES

1×Theft-Proof Hexagonal Wrench
1×Hexagonal Screw (M310, 304)
1×Operation Instruction Card
1×Quick Installation Guide
1×Certification Card

DIMENSIONAL DRAWING

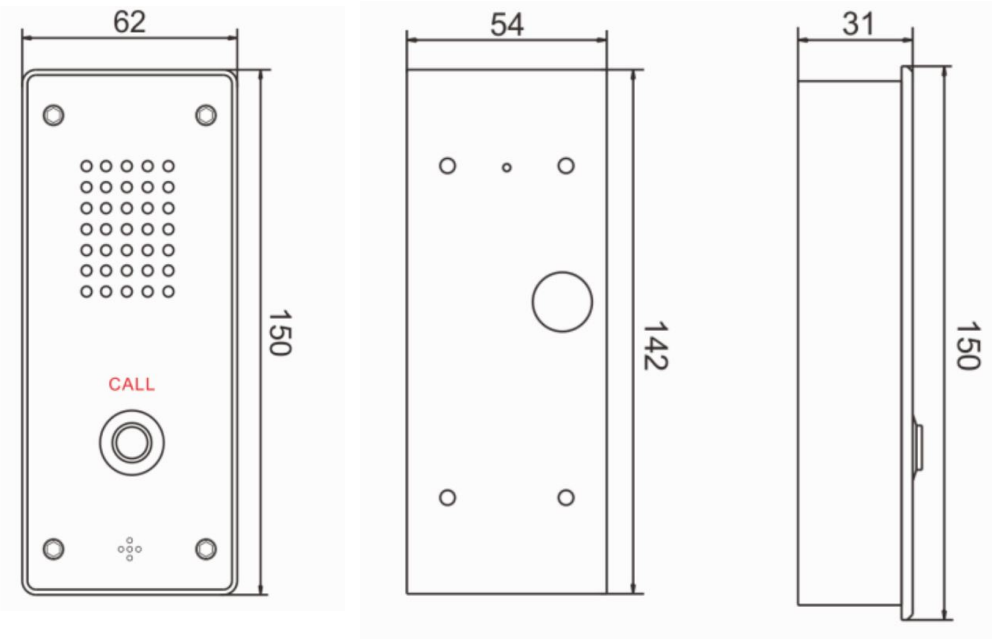

INTERFACE DESCRIPTION

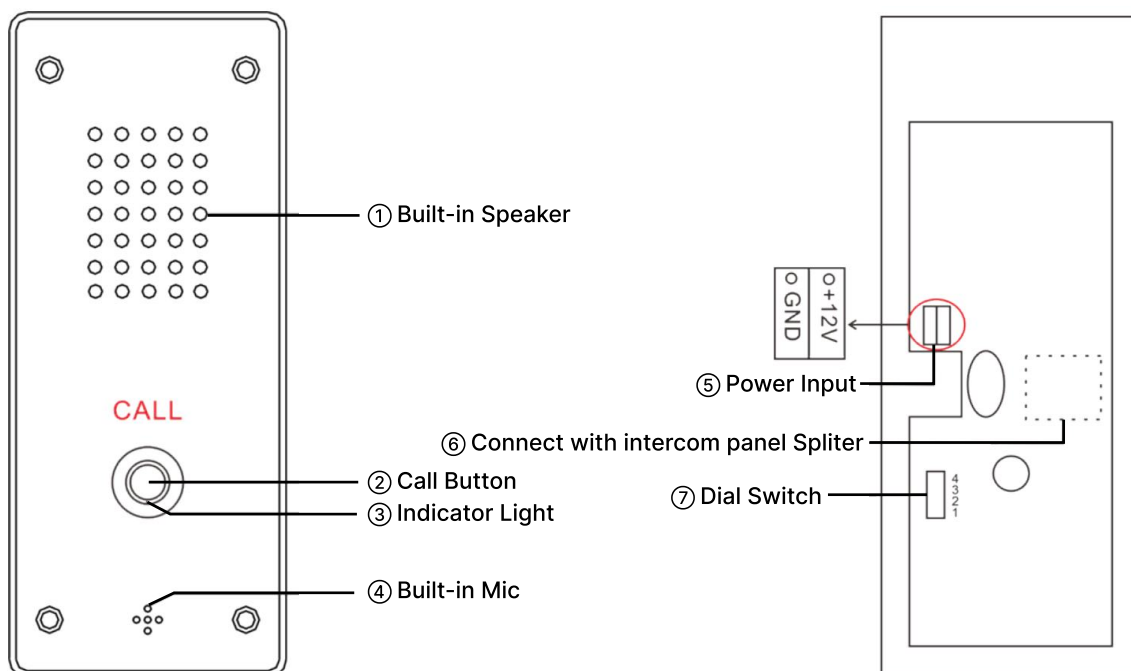


DIAL SWITCH RULE

Button	First Dial Switch	Second Dial Switch	Third Dial Switch	Forth Dial Switch
1#	ON	ON	ON	ON
2#	1	ON	ON	ON
3#	ON	2	ON	ON
4#	1	2	ON	ON
5#	ON	ON	3	ON
6#	1	ON	3	ON
7#	ON	2	3	ON
8#	1	2	3	ON

APPLICATIONS

Application 1

The Audio Intercom Panel NAS-8521D can be connected with the IP Split Type Audio Intercom Controller NAS-8521A to make two-way intercom with IP Master station, the call target of the Audio Intercom Panel NAS-8521D need to be set on the management software.

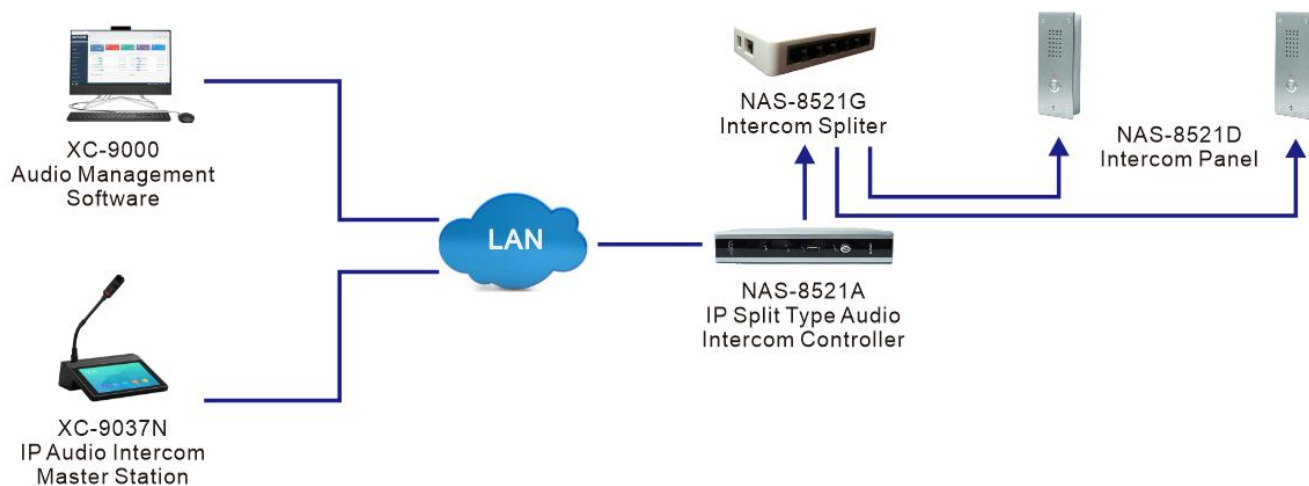

INSTALLATION

